



HANDICAP


# Series 8050




## FEATURES


- Underwriters' Laboratories Inc. Listed.
- ADA (Handicap) multi-sized closers with adjustable spring power for a range of sizes adjustable after installation:
  - 8051 ... .8<sup>1</sup>/<sub>2</sub> lb. opening force to a size 5
  - 8052 ... .5 lb. opening force to a size 4
  - 8053 ... .5 lb. opening force to a size 4
  - 8054 ... .8<sup>1</sup>/<sub>2</sub> lb. opening force to a size 5
- **CLOSER FUNCTIONS:**
  - 8051;** adjustable spring power with adjustable Back-Check controlled by a separate regulating valve, adjustable after installation.
  - 8052;** adjustable spring power with adjustable Delayed Closing Action controlled by a separate regulating valve, adjustable after installation.
  - 8053 & 8054;** Basic-adjustable spring power only.
- Two Speed Control Valves: Closing and Latching speeds controlled by separate regulating valves, adjustable after installation.
- Universal application. Non-handed for standard, top jamb or parallel arm installation.
- Rack and pinion mechanism contained in a high tensile precision cast aluminum housing.
- Stable hydraulic door check fluid for any climatic operation and constant lubrication.
- Furnished with regular, hold-open or fusible link hold-open arms.
- Hold-open arms are adjustable for holding from 90° to 180°
- Attractive "automotive type" finishes:
  - AL - Aluminum
  - BZ - Hardware Bronze (Gold)
  - DU - Storefront Bronze

DESCRIPTION		
Length of Closer	A	9 <sup>3</sup> / <sub>4</sub> "
Horizontal Mounting Holes	B	9 <sup>1</sup> / <sub>16</sub> "
Vertical Mounting Holes	C	3 <sup>3</sup> / <sub>4</sub> "
Overall Height	D	4 <sup>21</sup> / <sub>32</sub> "
Top of Door to Bottom of Closer	E	2 <sup>1</sup> / <sub>16</sub> "
Height of Closer	F	1 <sup>21</sup> / <sub>32</sub> "
Projection from Door	G	2 <sup>29</sup> / <sub>32</sub> "

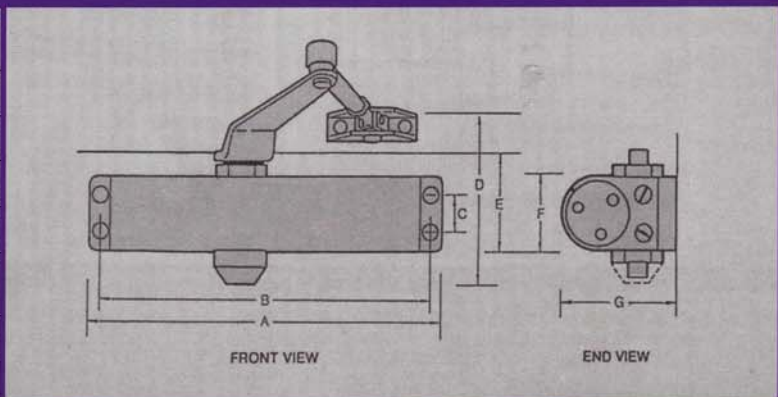


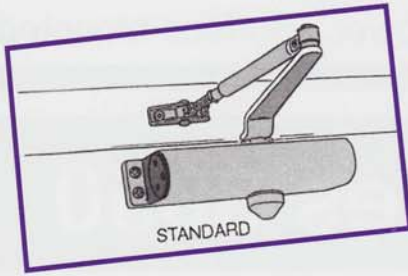

STANDARD

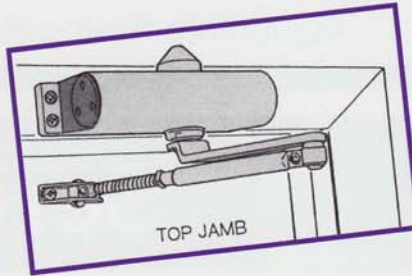

TOP JAMB

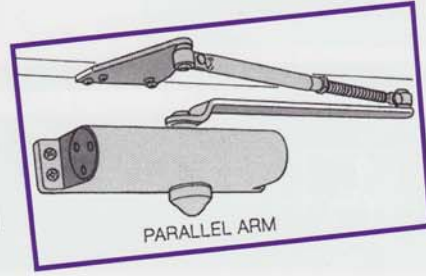

PARALLEL ARM

**TYPICAL INSTALLATIONS (REGULAR ARMS SHOWN)** Hold-Open Arms and Fusible Link Hold-Open Arms are similar

**SCHEDULE OF MODELS AND TYPES**

MODEL NO.				TYPE
BACK-CHECK	DELAYED ACTION	BASIC		
8051	8052	8053	8054	Regular Arm
8051-P	8052-P	8053-P	8054-P	Parallel Arm
8151	8152	8153	8154	Hold-Open Arm
8151-P	8152-P	8153-P	8154-P	Parallel Hold-Open Arm
8151-F	8152-F	8153-F	8154-F	Fusible Link Hold-Open Arm (handed)
8151-PF	8152-PF	8153-PF	8154-PF	Parallel Fusible Link Hold-Open (handed)

**PARTS AND ACCESSORIES - SERIES 8050**

**NOTE:**

Doors of unusual height or weight, or doors subject to severe wind or draft conditions, or abusive usage require one or two more full turns of hex spring adjustment nut than shown on the installation instructions.

**SPECIFY:**

Closer Model or Part Number

**SPECIFY FINISH:**

AL - Aluminum  
 BZ - Hardware Bronze (Gold)  
 DU - Storefront Bronze

**SPECIFY HAND:**

"RH" or "LH"- for all Fusible Link Hold-Open Arms

**WARRANTY:**

Refer to inside front cover.

**DESCRIPTION**

Main Arm		Part #	520
Regular Forearm		Part #	521
Hold-Open Forearm		Part #	522
Fusible Link Hold-Open Forearm (handed)		Part #	523
Top Jamb Forearm Extender		Part #	514
Parallel Bracket for Regular Arm		Part #	525
Parallel Bracket - for Hold-Open or Fusible Link Hold-Open Arm		Part #	526
Flat Drop Bracket		Part #	547
Top Jamb Bracket		Part #	TJB-54
Dress Cover		Part #	DC-8000
Thru Bolt and Grommet Nut (Set of 4 each)		Part #	TBGN-50

**International**  
 door closers<sup>inc</sup>

**EAST:**

1920 Air Lane Drive • Nashville, TN 37210  
 (615) 885-7060 • (800) 225-6737 • FAX: (615) 885-0903

**WEST:**

1140 North Kraemer Place • Anaheim, CA 92806  
 (714) 666-0390 • (800) 544-4422 • FAX: (714) 666-2215