



# Sleeve Anchor Carbon Steel

Aerosmith®'s Sleeve Anchor is an all-steel pre-assembled anchor that can be used in a variety of solid base materials. Most popular base materials include concrete and masonry. They are available in multiple head styles, such as, hex nut, acorn nut and flat head to give you the finished appearance for your specific application. Simply drill the same diameter hole as the anchor and install anchor through fixture and then tighten to required torque. Sleeve Anchor is an all-steel pre-assembled anchor that can be used in a variety of solid base materials. Most popular base materials include concrete and masonry.

## APPLICATIONS:

- Light to medium duty signage
- Electrical boxes
- Shelving
- Junction boxes
- Door frames
- Window frames

## FEATURES AND BENEFITS:


- Variety of head styles
- Can be used in a variety of base materials
- All steel component design
- Pre-assembled anchor for quick installation
- Anchor size is the same as hole size.

## BASE MATERIAL:

- Concrete
- Grout filled masonry
- Block (expansion must be in solid portion)
- Brick
- Stone

## ANCHOR COMPONENT MATERIALS:

Carbon Steel Zinc Plated  
(body, nut & washer, expansion sleeve Carbon Steel)

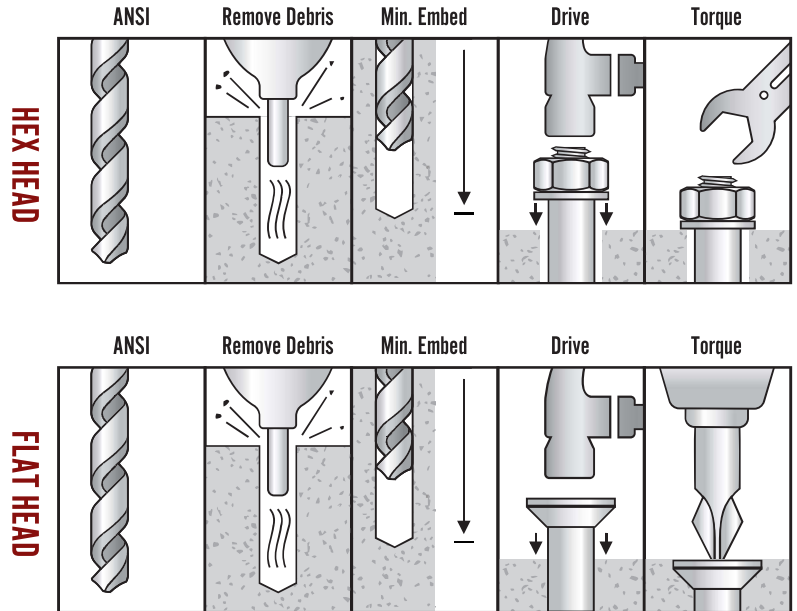

Part ID	Description	Usable Length	Diameter	ANSI Drill Diameter	Max. Fixture Thickness	Max. Torque	Box Quantity	Carton Quantity
SAH516112	5/16" X 1-1/2"	1-1/2"	5/16"	5/16"	1"	12 ft lbs	100	600
SAH516212	5/16" X 2-1/2"	2-1/2"	5/16"	5/16"	1"	12 ft lbs	100	500
SAH381780	3/8" X 1-7/8"	1-7/8"	3/8"	3/8"	1-1/4"	12 ft lbs	50	400
SAH383000	3/8" X 3"	3"	3/8"	3/8"	1-1/4"	18 ft lbs	50	250
SAH384000	3/8" X 4"	4"	3/8"	3/8"	1-1/4"	18 ft lbs	50	250
SAH122120	1/2" X 2-1/2"	2-1/2"	1/2"	1/2"	1-1/2"	18 ft lbs	25	150
SAH582140	5/8" X 2-1/4"	2-1/4"	5/8"	5/8"	2"	50 ft lbs	25	125
SAH123000	1/2" X 3"	3"	1/2"	1/2"	1-1/2"	26 ft lbs	25	150
SAH126000	1/2" X 6"	6"	1/2"	1/2"	1-1/2"	26 ft lbs	10	50
SAH583000	5/8" X 3"	3"	5/8"	5/8"	2"	26 ft lbs	25	125
SAH584140	5/8" X 4-1/4"	4-1/4"	5/8"	5/8"	2"	50 ft lbs	10	80
SAH585340	5/8" X 5-3/4"	5-3/4"	5/8"	5/8"	2"	50 ft lbs	10	50
SAH342140	3/4" X 2-1/2"	2-1/2"	3/4"	3/4"	2-1/4"	90 ft lbs	10	80
SAH344140	3/4" X 4-1/4"	4-1/4"	3/4"	3/4"	2-1/4"	50 ft lbs	10	40
SAH346140	3/4" X 6-1/4"	6-1/4"	3/4"	3/4"	2-1/4"	90 ft lbs	10	30
SAH348140	3/4" X 8-1/4"	8-1/4"	3/4"	3/4"	2-1/4"	90 ft lbs	5	20
Part ID	Description	Usable Length	Diameter	ANSI Drill Diameter	Max. Fixture Thickness	Max. Torque	Box Quantity	Carton Quantity
SAA145800	1/4" X 5/8"	5/8"	1/4"	1/4"	1/2"	90 ft lbs	100	1000
SAA141380	1/4" X 1-3/8"	1-3/8"	1/4"	1/4"	1/2"	6 ft lbs	100	800
SAA142140	1/4" X 2-1/4"	2-1/4"	1/4"	1/4"	1/2"	6 ft lbs	100	600
SAC382340	3/8" X 2-3/4"	2-3/4"	3/8"	3/8"	1-1/4"	6 ft lbs	50	300
SAC384000	3/8" X 4"	4"	3/8"	3/8"	1-1/4"	18 ft lbs	50	250
SAC385000	3/8" X 5"	5"	3/8"	3/8"	1-1/4"	18 ft lbs	50	250
SAC386000	3/8" X 6"	6"	3/8"	3/8"	1-1/4"	18 ft lbs	50	250